



TRUST IN THE  
TOUGHEST CONDITION

---

PORT & INDUSTRIAL

# TABLE HEADER

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	TREAD DEPTH



SECTION WIDTH



OVERALL DIAMETER



STATIC LOADED RADIUS



ROLLING CIRCUMFERENCE

## FEATURES







- Sturdy lugs
- Flat tread with large width
- More rubber in footprint
- Continuous tread pattern

## BENEFITS

- Self cleaning property
- High ground contact area for good traction on paved surface
- Improved penetration resistance
- Longer service life




## PORT PRO TX - TRA CODE: IND-3

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
								
18.00-25	40	TL	13.00	510 20.1	1617 63.7	743 29.3	4781 188.2	32 40
21.00-25	40	TL	15.00	585 23.0	1759 69.3	800 31.5	5140 202.4	35 45
21.00-35	40	TL	15.00	580 22.8	2025 79.7	930 36.6	5987 235.7	37 47

All tyres conform to TRA and ETRTO Standards

## APPLICATION:



RTG CRANE

Fitment Position  Recommended

## FEATURES







- Special wear resistance compound
- Strong nylon casing
- Strong bead
- Higher under tread

## BENEFITS

- Supports heavy load & extreme working conditions
- Long service life
- Ideal for usage on hard, concrete & asphalt surfaces
- Puncture resistance




## PORT PRO RX - TRA CODE: IND- 4

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
								
12.00-24	20	TT	8.5	325 12.8	1285 50.6	603 23.7	3803 149.7	35 44
18.00-25	40	TL	13.00	498 19.6	1673 65.9	764 30.1	4952 195.0	56 71
18.00-33	40	TL	13.00	498 19.6	1877 73.9	866 34.4	5556 218.7	58 73

All tyres conform to TRA and ETRTO Standards

## APPLICATION:



Fitment Position  Recommended

## FEATURES







- Flat tread with large width
- Specially formulated tread compound
- Reinforced sidewall

## BENEFITS

- High ground contact area for good traction on paved surface
- Improved penetration & heat resistance
- Longer service life




## PORT-PRO SL - TRA CODE: IND-4

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
								
18.00-25	40	TL	13.00	498 19.6	1673 65.9	768 30.2	4952 195.0	56 71
18.00-33	40	TL	13.00	498 19.6	1877 73.9	862 33.9	5556 2187	70 88

All tyres conform to TRA and ETRTO Standards

## APPLICATION:



Fitment Position  Recommended

## FEATURES

- Flat tread with large width
- Specially formulated compound with extra deep tread
- Reinforced sidewall

## BENEFITS

- High ground contact area for good traction on paved surface
- Improved penetration & heat resistance
- Longer service life




## PORT-PRO SL - TRA CODE: IND-5

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
18.00-25	40	TL	13.00	498 19.6	1673 65.9	768 30.2	4952 195.0	80 101

All tyres conform to TRA and ETRTO Standards

## APPLICATION:



Fitment Position  Recommended

## FEATURES

- First in the industry with IND 4.5 specifications - extra deep tread higher base cover compared to IND 4
- Superior tread compound
- Tough and heavy-duty carcass
- Strong bead

## BENEFITS

- Suitable for heavy duty use on hard, concrete and asphalt surfaces
- Reduces heat built-up
- Improved puncture resistance
- Longer service life




## PORT XL PLUS - TRA CODE: IND-4.5

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
18.00-25	40	TL	13	505 19.9	1680 66.2	768 30.2	4975 195.9	67 84

All tyres conform to TRA and ETRTO Standards

## APPLICATION:



Fitment Position  Recommended



## FEATURES

- Specially designed non-directional tread pattern
- Heavy duty nylon casing
- Special heat, cut & weather resistance compound

## BENEFITS

- Long service life
- Reduced heat built up
- Higher stability




## GRIP MASTER-ND - TRA CODE:IND-3

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
14.00-24	28	TT	10.00	385 15.2	1368 53.9	630 24.8	4050 159.4	26 33

All tyres conform to TRA and ETRTO Standards

## APPLICATION:



Fitment Position  Recommended



## FEATURES

- Special wear resistance compound
- Strong nylon casing
- Strong bead
- Higher under tread

## BENEFITS

- Supports heavy load & extreme working conditions
- Long service life
- Ideal for usage on hard, concrete & asphalt surfaces
- Puncture resistance




## ROCK - XL - TRA CODE: IND-3

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
16.00-25	32	TL	11.25	444 17.5	1485 58.55	682 26.9	4418 173.9	29 37

All tyres conform to TRA and ETRTO Standards

## APPLICATION:



Fitment Position  Recommended

## FEATURES

- Specially formulated deep tread
- Reinforced sidewalls
- Flatter tread with larger tread width

## BENEFITS

- High ground contact area for good traction on paved surface
- Long service life
- Resistance to wear & damages




## SLICK-431 - TRA CODE: L4S

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
16.00-25	32	TL	11.25	432 17.0	1548 60.94	715 28.5	4580 180.3	54 68

All tyres conform to TRA and ETRTO Standards

## APPLICATION:

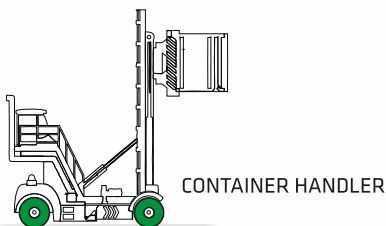

Fitment Position  Recommended

## FEATURES







- Specially formulated deep tread
- Reinforced sidewalls
- Flatter tread with larger tread width

## BENEFITS

- High ground contact area for good traction on paved surface
- Long service life
- Resistance to wear & damages




## SLICK-404 - TRA CODE: L55

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
								
12.00-20	20	TT	8.50	315 12.4	1163 45.8	538 21.2	3433 135.2	54 68
12.00-24	20	TT	8.5	310 12.2	1270 50	592 23.3	3759 148	54 68
14.00-24	28	TT	10.00	375 14.8	1418 55.8	658 25.9	4197 165.2	62 78
17.5-25	20	TL	14	445 17.5	1399 55.08	648 25.51	4141 163.03	63 79
18.00-25	32 40	TL	13.00	498 19.6	1673 65.9	768 30.2	4952 195.0	77 97

All tyres conform to TRA and ETRTO Standards

## APPLICATION:



CONTAINER HANDLER

Fitment Position  Recommended

## FEATURES







- Specially designed heavy duty tyre
- Alternate continuous lugs with high contact area
- Tough casing
- Superior tread compound

## BENEFITS

- Maximum stability & load distribution
- Excellent durability
- High resistance to wear, tear & cuts



## ELEVATA

SIZE	PR	Type	Rim	Unloaded Dimension				TD mm 32nds
				SW	OD	SLR	RC	
				mm	mm	mm	mm	
				in	in	in	in	
								
6.00-9/ 6.90-9	10PR 118A5	TT	4.00E	160 6.3	540 21.3	245 9.6	1599 63	15 19
6.50-10	10PR 122A5	TT	5.00F	177 7.0	588 23.1	267 10.5	1740 68.5	16 20
7.00-12	12PR 133A5 14PR 134A5	TT	5.00K	192 7.6	683 26.9	311 12.2	2027 79.8	17 21
8.25-15	12PR 146A5 14PR 149A5	TT	6.5	236 9.3	847 33.3	386 15.2	2515 99	19 23

All tyres conform to TRA and ETRTO Standards

## APPLICATION:



FORKLIFT

Fitment Position  Recommended