

TURF XL

CEAT
SPECIALTY

WITH THE POWER OF CTR*

FEATURE

More rubber on the contact surface

BENEFIT

Better performance in all soil and turf conditions

FEATURE

Specific tread pattern

BENEFIT

Improving stability & traction also equally load distribution.

FEATURE

High tread depth

BENEFIT

Better performance in all soil and turf conditions

FEATURE

Unique rounded shoulder block design

BENEFIT

No turf damage and ease while turning

FEATURE

Unique Alignment of Blocks

BENEFIT


Excellent steering stability and improved lateral traction and enables self-cleaning

FEATURE

Enlarged contact area

BENEFIT

Improving stability & traction

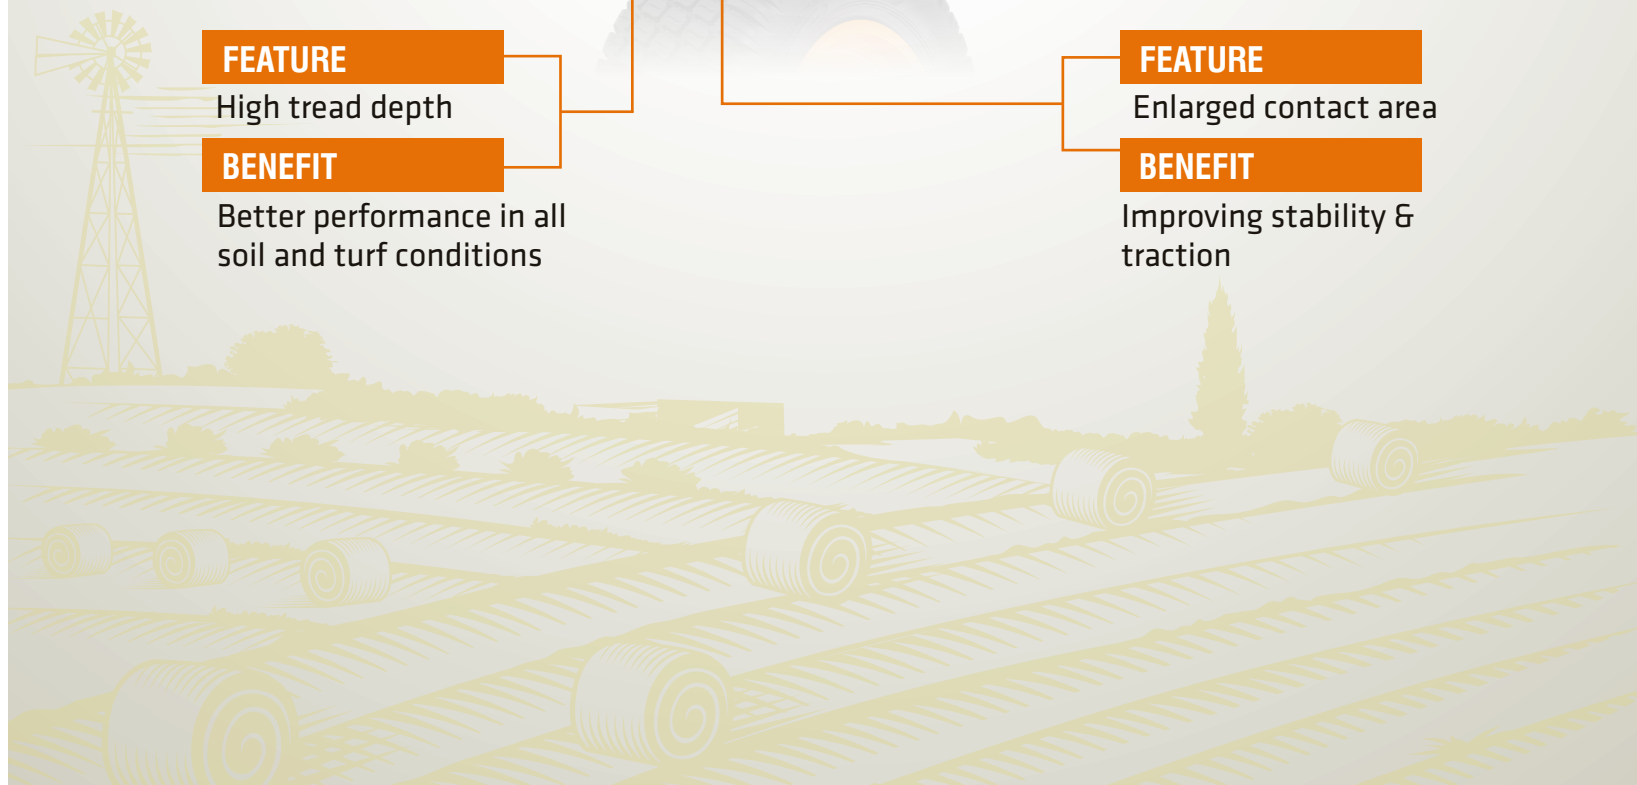

LIST OF SIZES

SIZE	LI/SS
13.6-16	96 A8
23x10.50-12	8PT TL\113 A2
24x8.5-14	94 A2
25x8.5-14	94A2
25X8.5-14	107A2

All tyres conform to ETRTO & TRA standards. Sizes available as of 02/2022.




Size	Rim	Type	Infl tire dimension		Static Loaded radius	Rolling circm.	PR	Load Index	Infl. Press.	Recommended load, kg (lbs)				
			SW	OD						Speed, km/h (mph)				
			mm/in	mm/in	Industrial Tractor									
					Static	15		25	30	40				
13.6-16	W12 X 16	TL	365	960	420	2850	4 PR	96 A8	1	1690	950	790	760	710
			14.4	37.8	16.5	112.2			15	3720	2090	1740	1680	1560

Size	Rim	Infl tire dimension		Static Loaded radius	Rolling circm.	Load Index	Infl. Press.	Recommended load, kg (lbs)					
		SW	OD					Speed, km/h (mph)					
		mm	mm	GARDEN TRACTORS									
		in	in	Static	10	15	25	30	40				
23X10.50-12	8.5X12	265	585	270	1740	8 PR TL	3	1820	1150	910	860	820	770
		10.4	23.0	10.6	68.5	113 A2	44	4010	2530	2010	1900	1810	1700

All tyres conform to T & RA and ETRTO Standards

Size	Rim	Type	Infl tire dimension		Static Loaded radius	Rolling circm.	PR	Load Index	Infl. Press.	Recommended load, kg (lbs)				
			SW	OD						Speed, km/h (mph)				
			mm/in	mm/in	Industrial Tractor									
					Static	10		20	30	40				
24X8.5-14	7JA X14	TL	215	615	280	1830	4 PR	94A2	1.6	1060	670	510	460	420
			8.5	24.2	11.0	72.0			23	2340	1480	1120	1010	930

Size	Rim	Type	Infl tire dimension		Static Loaded radius	Rolling circm.	PR	Load Index	Infl. Press.	Recommended load, kg (lbs)				
			SW	OD						Speed, km/h (mph)				
			mm/in	mm/in	Industrial Tractor									
					Static	10		20	30	40				
25X8.5-14	7JA X14	TL	220	660	300	1960	6 PR	107 A2	3.4	1530	970	740	660	610
			8.7	26.0	11.8	77.2			49	3370	2140	1630	1450	1340

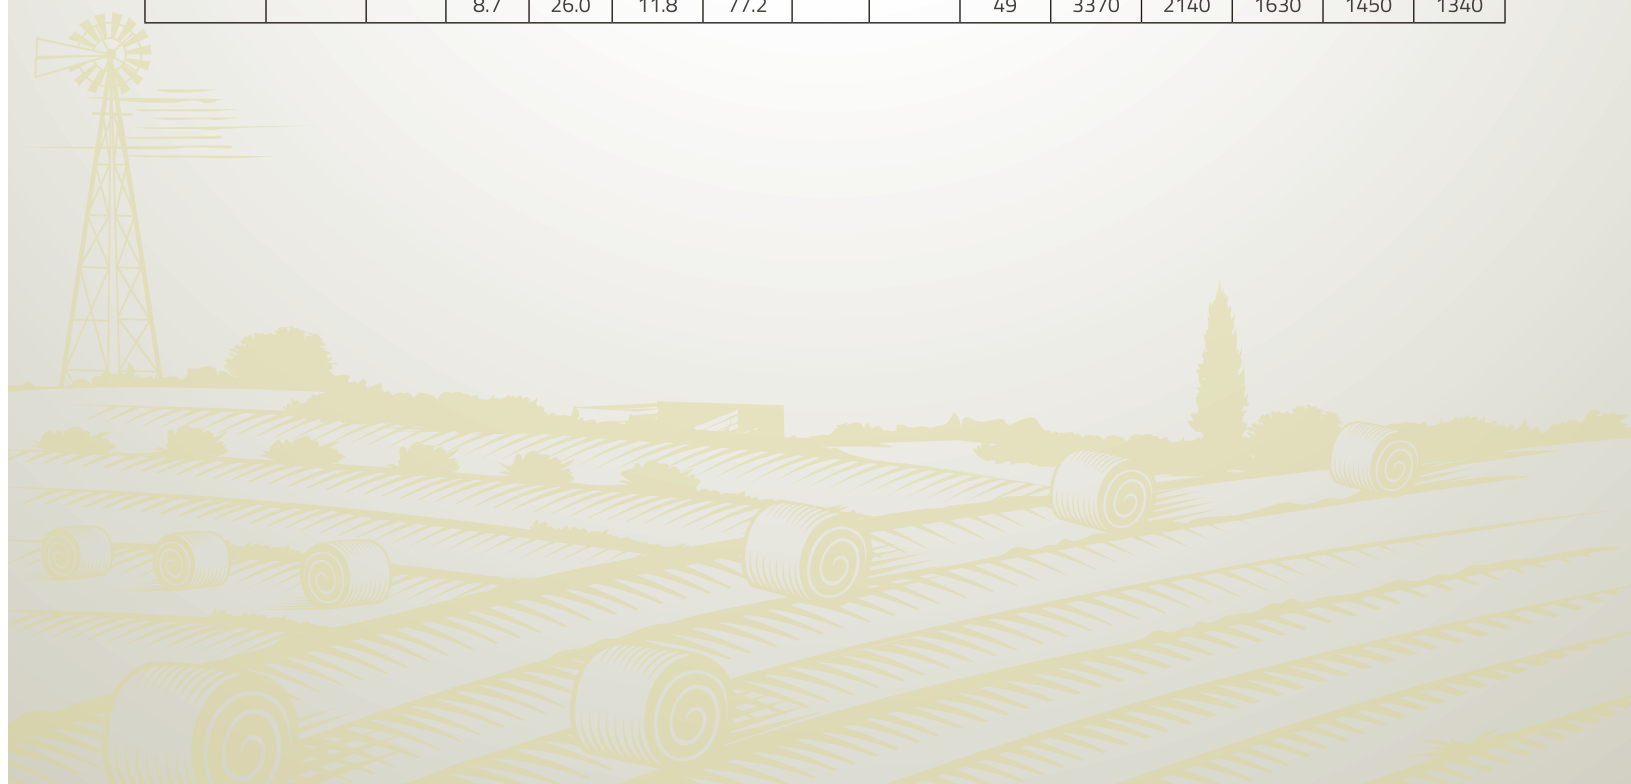

Size	Rim	Infl tire dimension		Static	Rolling	Load Index	Infl. Press.	Recommended load, kg (lbs)						
		SW	OD	Loaded radius	circm.			Speed, km/h (mph)						
		mm	mm	mm	mm			GARDEN TRACTORS						
		in	in	in	in			10	15	25	30	40		
								Static	6	9	16	19	25	
26x12.00-12	10.50 I - 55 ; I - 70	307 12.1	648 25.5	300 11.8	1920 75.6	8 PR TL 123 A2	3	1440	1150	910	860	820	770	
							44	3170	2530	2010	1900	1810	1700	
						10 PR TL 127 A2	3.75	2180	1750	1380	1310	1240	1170	
							54	4800	3860	3040	2890	2730	2580	
						12 PR TL 131 A2	4.5	2430	1950	1540	1460	1390	1310	
							65	5360	4300	3390	3220	3060	2890	

All tyres conform to T & RA and ETRTO Standards

Size	Rim	Type	Infl tire dimension		Static	Rolling circm.	PR	Load Index	Infl. Press.	Recommended load, kg (lbs)				
			SW	OD	Loaded radius					Speed, km/h (mph)				
			mm/in	mm/in	mm/in					Industrial Tractor				
										Static	10	15	30	50
											6	9	19	31
38X14-20	W11X20	TL	355	975	420	2900	4 PR	110B	1.7	2810	1880	1400	1190	1060
			14	38.4	16.5	114.2			25	6190	4140	3090	2620	2340

