


FEATURES AND BENEFITS

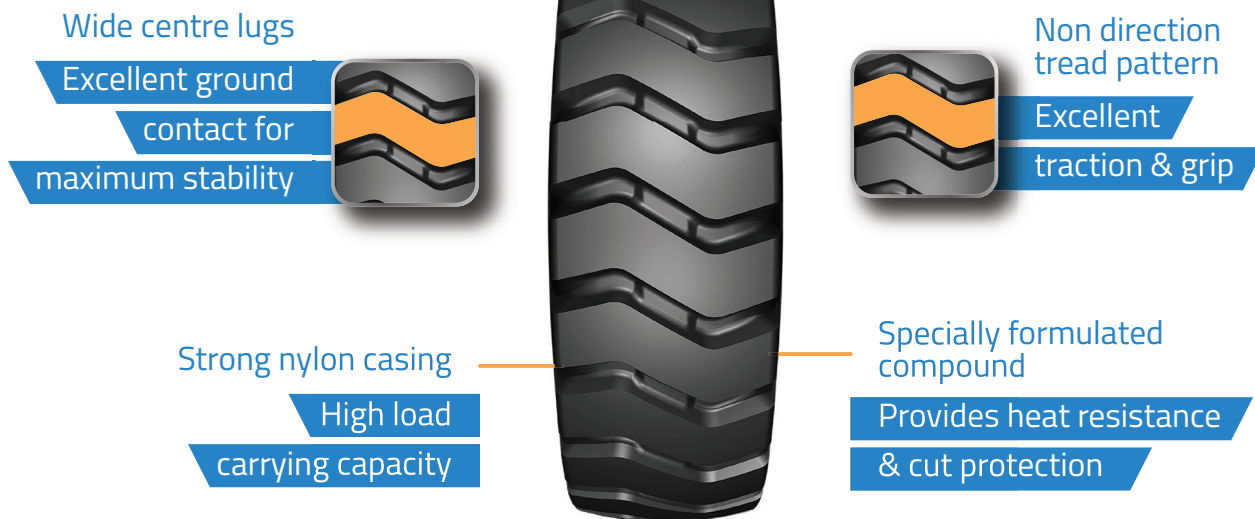

TRAC XL

TRA CODE : E3 / L3

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Load Capacity			
					SW	OD			Transport (50 kmph/ 30mph)		Loading (10 kmph/5mph)	
					mm/in	mm/in			Max load	Infl. Prs.	Max load	Infl. Prs.
					mm/in	mm/in			mm/in	mm/in	mm/in	mm/in
14.00-20	22	TT	10	2	382	1266	583	3750	5.5	4365	8230	8.5
					15	50	23	148	80	9625	18145	125
17.5-25	16	TL	14	1.5	445	1348	624	3990	4250	3	7300	4.75
		9350			44	16100	69					
	20	TL			18	53	25	157	5000	4	8250	5.75
	11000	58			18200	83						
20.5-25	20	TL	17	2	521	1493	686	4416	6000	3.25	9500	4.5
					21	59	27	174	13200	47	20900	65.25
23.5-25	20	TL	19.5	2.5	597	1617	740	4786	6150	2.25	9500	3
					24	64	29	188	13600	33	20900	44
26.5-25	28	TL	22	3.0	677	1750	798	5125	10000	3.5	15500	4.75
					27	69	31	202	22000	51	34170	69